



A very gentle and hygienic
bathroom experience

www.iwashwish.com.au

info@iwashwish.com.au

Australia Horizon Pty Ltd

ABN: 49 626 746 487



SMART BIDET TOILET SEAT



Easy to transform your existing toilet seat to a hygienic smart toilet bidet. Many quality functions at the touch of a button including:

- ▶ four level Water Temperature adjustment Off→34°C→37°C→40°C
- ▶ four level Seat Temperature adjustment Off→34°C→37°C→40°C
- ▶ four level Dryer Temperature adjustment Off→35°C→45°C→55°C
- ▶ five level water spray pressure adjustment
- ▶ adjustable nozzle position
- ▶ nozzle self-cleaning (before and after use of bidet)
- ▶ automatic Ultraviolet Light sterilisation
- ▶ oscillating wash and more

Our modern and stylish smart bidet toilet seat has many benefits which may include:


- ▶ being hygienic and refreshing wash
- ▶ reducing irritation and pain associated with urinary tract infection, hemorrhoids, rashes and abrasions where using toilet paper is harsh
- ▶ maintain independence and dignity for those who have difficulty wiping
- ▶ providing soothing relief during pregnancy and gentle after child birth
- ▶ being environmentally friendly (minimise use of toilet paper, landfill and household waste)

UV Sterilisation (Ultraviolet Light Sterilisation)

The medical grade UV Sterilisation light will be automatically on 10 seconds after the user rises from the seat and will remain active for 3 minutes to kill virus and bacteria on and around the nozzle

IWAHWISH is the trademark of Australia Horizon Pty Ltd, registered in Australia. The information on this brochure is presented as general information only, contents may change without prior notice.

CONTROL PANEL

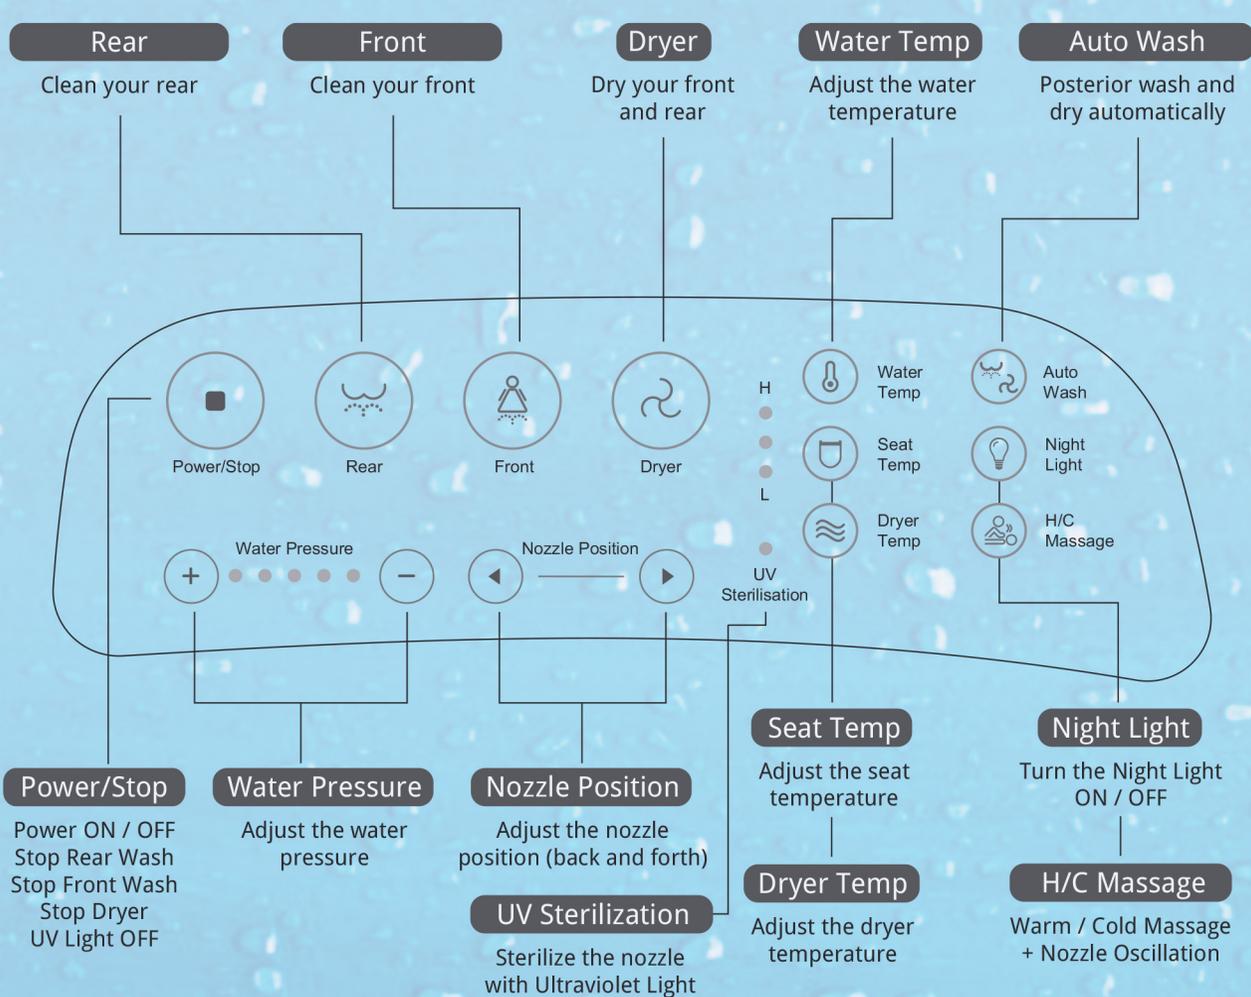



Bidet requires below measurement for installation. Above depicts the size of distance is between 2 mounting holes.

IMPORTANT! Before buying the product, ensure that you meet all the requirements listed below

Power Requirements

- ▶ Rated Voltage: AC 220V-240V, 50Hz
- ▶ Rated Power: 1200W

Water Requirements

- ▶ Please use regular tap water supply. DO NOT use recycled water as this could damage the device and may harm the user
- ▶ The minimum dynamic water pressure required is 0.08MPa.
- ▶ The maximum static water pressure required is 0.8MPa.

Sizing Requirements

- ▶ Measure your toilet prior to installation to ensure there is enough space for the bidet (518mm lengthways)
- ▶ The distance between the 2 mounting holes must be within 116 -178mm
- ▶ The distance from the T-valve to the bidet inlet should be within 600mm or add a hose extension
- ▶ The distance between the mounting holes and the edge of the toilet bowl must be within 457 - 501mm

